

c2/c3

Guide for a successful installation

Before you install your new C2 or C3 integrated tap, there are a few things to bear in mind for a successful installation.

Consider water, waste, power and space.

Full installation instructions and cutting templates are provided in the product manual.

Capacity	Chilled 50 L/hr Sparkling 80 L/hr
Temperature	Chilled 2°C Sparkling 2°C
Dispense height	C2 290mm C3 300mm
Power	230-240V
Dimensions	C2 Tap W165 x D220 x H510mm C3 Tap W235 x D235 x H510mm Undercounter W320 x D430 x H375mm
System	ProCore® DryChill®
Technology	DeepSparkle®
Hygiene	Totality®

Drip tray cutout
405 x 225mm.
Use cutting template
provided in box.
(Not required for over-
sink installation).

Minimum
clearance
510mm.

Tap tray cutout
C2 circular 35mm.
C3 circular 50mm.
Use cutting template
provided in box.

10A*
power supply.
Single socket
within 2m of unit.
*Earth leakage
protected

Mains waste
connection,
or Bluetooth®
Waste Kit

Mains supply
potable water.
0.05MPa (0.5 bar)
min pressure,
within 2m of unit.

Vent kit cutout
300 x 30mm.
Allow clearance of
45mm each side.
Cutting template
available.

C2/C3 Cutting Template

SimpleFit® Vent Kit Cutting Template

borg &
overström

For support please contact



+44 (0)1362 695 006



support@borgandoverstrom.com

VIEW C2/C3
MANUAL




c2/c3

Guide for a successful installation

Once your C2 or C3 integrated tap is installed, you will need to sanitise prior to first use.

Full operation and sanitisation instructions are provided in the product manual.

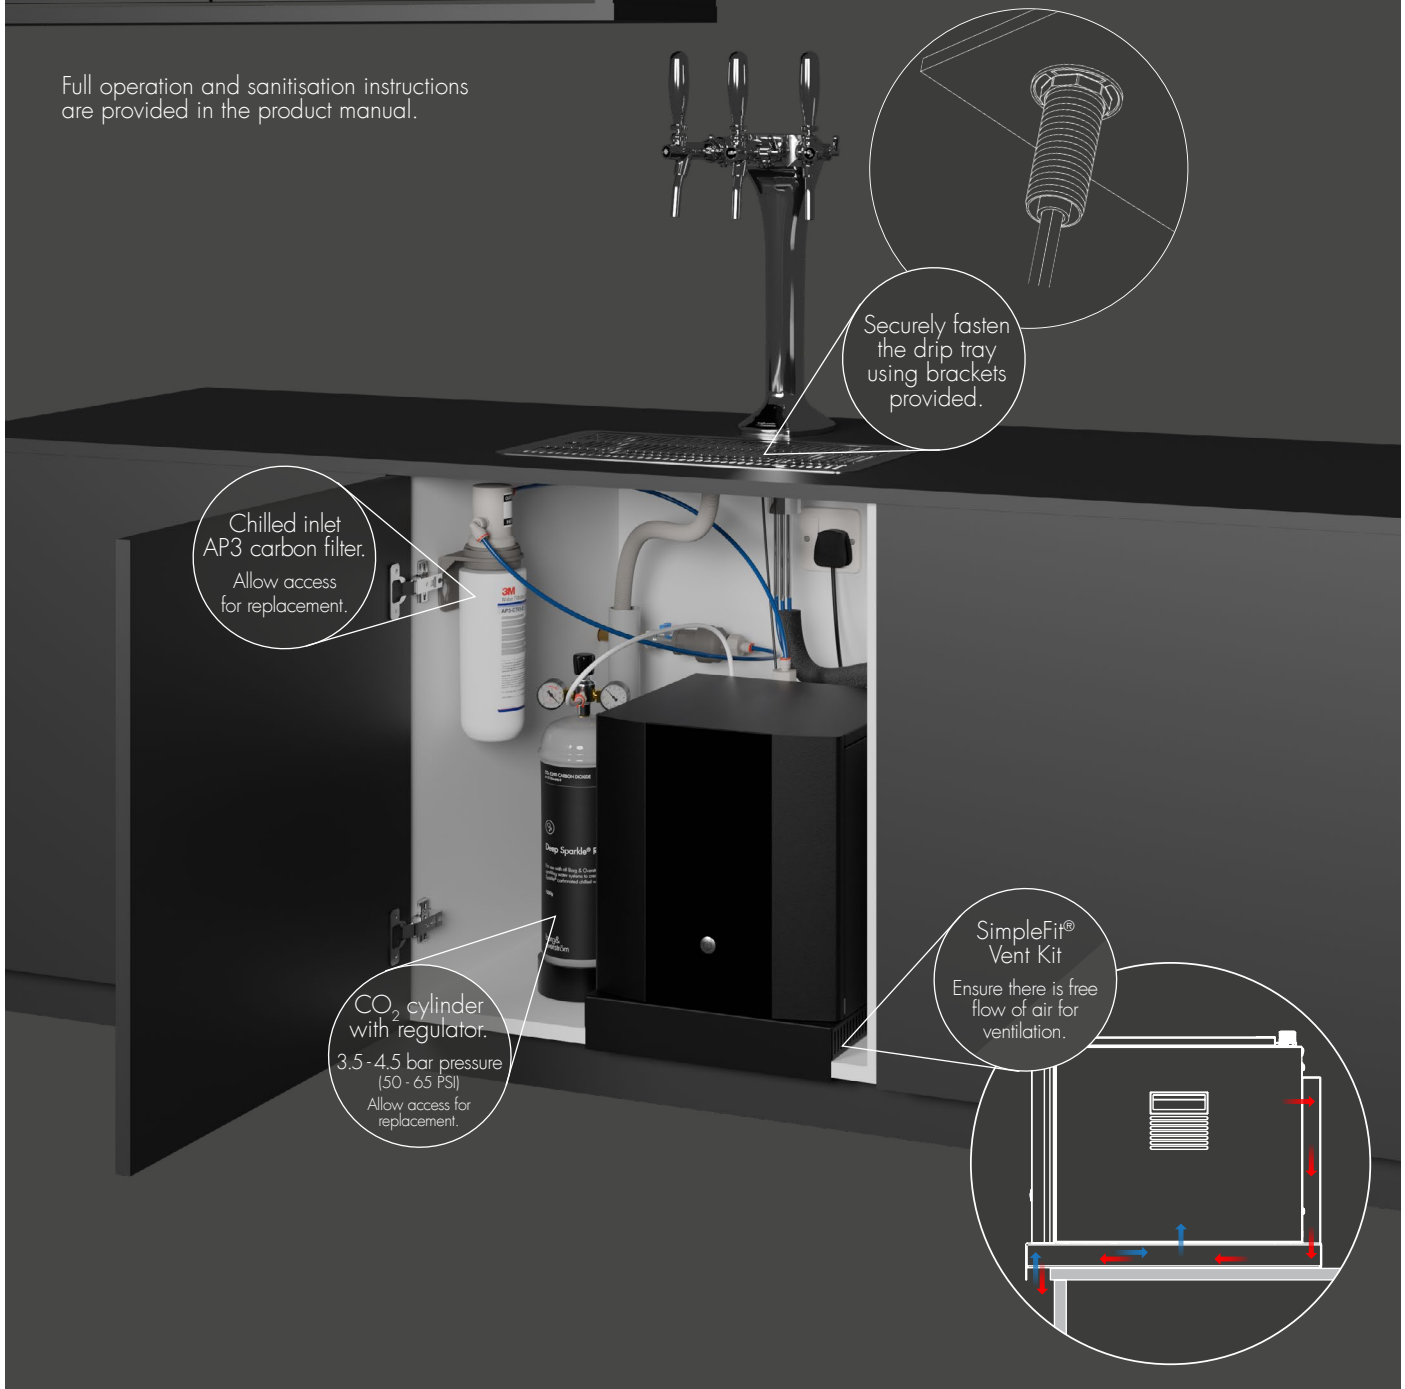

borg &
overström

For support please contact



+44 (0)1362 695 006



support@borgandoverstrom.com

VIEW C2/C3
MANUAL

